

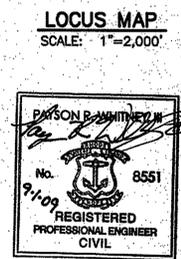




**NOTES:**

- CUTTING OF LARGE TREES WILL BE AVOIDED ALONG THE ROUTE OF THE FENCE INSTALLATION.
- DUE TO DENSITY OF GROWTH, ONLY TREES CLOSE TO CLEARINGS HAVE BEEN SURVEYED. TREES MARKED ARE WHITE PINE SPECIES. AN ADDITIONAL 19 SAPPLINGS (LESS THAN 6" DIAMETER) OF CONIFER AND DECIDUOUS SPECIES ARE PROPOSED TO BE CLEARED FROM THE ZONE WITHIN 60' OF THE PROPOSED 50'-7" X 22' PAD.

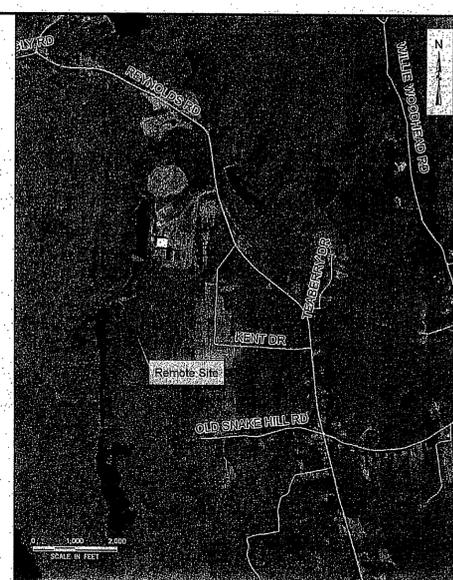

- GENERAL NOTES:**
- WETLAND RESOURCE BOUNDARIES BASED ON WETLAND DELINEATION CONDUCTED BY ESS GROUP, INC. ON APRIL 28, 2009.
  - WETLAND FLAGS LOCATED WITH TRIMBLE GEO-XT GLOBAL POSITIONING SYSTEM (SUB-METER ACCURACY).
  - BASE PLAN COMPILED FROM PLAN RECEIVED FROM FM GLOBAL DATED AUGUST 21, 2009.

- SEDIMENTATION & EROSION CONTROL NOTES:**
- SOIL AND EROSION CONTROLS SHALL BE PLACED PRIOR TO ANY CONSTRUCTION ACTIVITIES AS SHOWN ABOVE.
  - HAYBALES AND SILT FENCE TO BE INSTALLED AS INDICATED ON THE DRAWINGS AND AS SPECIFIED BY THE SITE ENGINEER.
  - THE CONTRACTOR SHALL BE RESPONSIBLE FOR IMPLEMENTING EROSION CONTROL MEASURES IN ORDER TO PREVENT OFF-SITE TRACKING OF EARTH, SEDIMENT AND DEBRIS.
  - AREAS TO REMAIN UNSTABILIZED FOR A PERIOD OF MORE THAN 14 DAYS SHALL BE TEMPORARILY SEEDED AND BARK MULCHED.
  - ALL DISTURBED AREAS NOT OCCUPIED BY PAVEMENT, SIDEWALK OR RIP RAP SHALL BE COVERED WITH 4" (MIN.) OF LOAM AND SEEDED.
  - PERMANENT SEEDING SHALL OCCUR BETWEEN MARCH 1 AND JUNE 15, OR BETWEEN AUGUST 15 AND OCTOBER 15.
  - SOILS TO BE STOCKPILED FOR A PERIOD OF MORE THAN 14 DAYS SHALL BE SURROUNDED BY EROSION CONTROL BARRIERS AND TEMPORARILY SEEDED AND MULCHED.
  - TEMPORARY STORAGE OF MATERIALS ON-SITE IS TO BE LOCATED AS FAR FROM WETLAND AREAS AS FEASIBLE, AND AS DIRECTED BY THE ENGINEER. THERE IS TO BE NO LONG TERM STORAGE OF MATERIAL ON-SITE. MATERIAL NOT USED ON-SITE IS TO BE TRUCKED TO AN ACCEPTABLE OFF-SITE DISPOSAL LOCATION.
  - EROSION CONTROL MEASURES SHALL BE INSPECTED EVERY (7) CALENDER DAYS, AND WITHIN 24 HOURS FOLLOWING A RAINFALL EVENT OF GREATER THAN 0.5 INCHES OF RAIN PER 24 HOUR PERIOD. ANY NECESSARY REPLACEMENT OR REPAIR SHALL BE PERFORMED PROMPTLY BY THE CONTRACTOR AT HIS/HER EXPENSE.
  - DUST SHALL BE CONTROLLED AS NECESSARY THROUGH THE USE OF WATER, THE USE OF CALCIUM CHLORIDE FOR DUST CONTROL IS NOT ALLOWED, UNLESS OTHERWISE SPECIFIED BY THE ENGINEER.

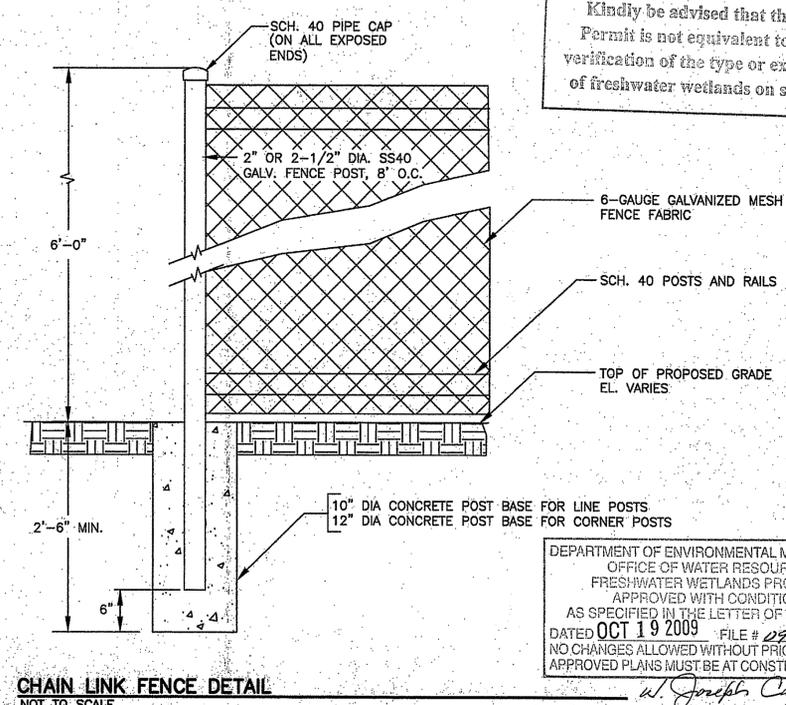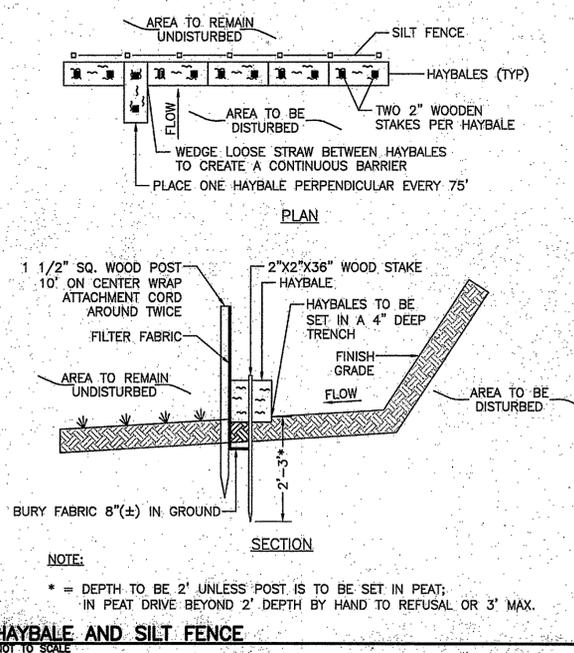

Kindly be advised that this Permit is not equivalent to a verification of the type or extent of freshwater wetlands on site.

**FOR PERMITTING PURPOSES ONLY**

**ESS Group, Inc.**  
Engineers  
Scientists  
Consultants

888 Worcester Street, Suite 240  
Wellesley, Massachusetts 02482  
p 781.431.0500  
f 781.431.7434  
www.essgroup.com

FM Global Research Campus  
743 Reynolds Road  
West Gloucester, Rhode Island

Remote Site  
Proposed Fence Location

DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
OFFICE OF WATER RESOURCES  
FRESHWATER WETLANDS PROGRAM  
APPROVED WITH CONDITIONS  
AS SPECIFIED IN THE LETTER OF APPROVAL  
DATED OCT 19 2009 FILE # 09-0146  
NO CHANGES ALLOWED WITHOUT PRIOR APPROVAL.  
APPROVED PLANS MUST BE AT CONSTRUCTION SITE.

PROJECT No: F284-017.2 DRAWING No. 1  
DATE OF ISSUE: June 30, 2009  
SHEET No: 1 of 1  
SCALE: As Shown

DATE: Aug 31, 2009 11:34:59 AM  
FILENAME: F:\284\_017\_2\_01.dwg  
DRAWN BY: ELU  
CHECKED BY: PRW  
DESIGNED BY:  
APPROVED BY: PRW  
Copyright © ESS Group, Inc., 2009