

ESTABLISHMENT OF VEGETATIVE COVER

- SLOPES SHALL NOT BE LEFT UNATTENDED OR EXPOSED FOR EXCESSIVE PERIODS OF TIME SUCH AS THE INACTIVE WINTER SEASON. THE CONTRACTOR SHALL INITIATE APPROPRIATE VEGETATIVE PRACTICES ON ALL DISTURBED AREAS AS SOON AS POSSIBLE BUT NOT MORE THAN FOURTEEN (14) DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT AREA HAS TEMPORARILY OR PERMANENTLY CEASED, UNLESS THE ACTIVITY IS TO RESUME WITHIN TWENTY-ONE (21) DAYS.
- ALL DISTURBED SLOPES EITHER NEWLY CREATED OR CURRENTLY EXPOSED SHALL BE SEEDED OR PROTECTED.
- THE TOPSOIL SHALL HAVE A SANDY LOAM TEXTURE RELATIVELY FREE OF SUBSOIL MATERIAL, STONES, ROOTS, LIMBS OF SOIL, TREE LIMBS, TRASH OR CONSTRUCTION DEBRIS AND SHALL CONFORM WITH RHODE ISLAND DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, M.20.
- THE TEMPORARY SEEDING DESIGN MIX SHALL BE COMPRISED OF THE FOLLOWING:

TYPE	% BY WEIGHT
ANNUAL RYEGRASS	40
PERENNIAL RYEGRASS	60

- THE NEW ENGLAND EROSION CONTROL/RESTORATION SEED MIX SHALL BE COMPRISED OF THE FOLLOWING:

TYPE	% BY WEIGHT
UPLAND BENTGRASS	1.0
CREeping BENTGRASS	1.0
BIG BLUESTEM	8.0
NEW ENGLAND ASTER	1.0
FOX SEDGE	8.0
VIRGINIA WILD RYE	28.0
BONASET	1.0
GRASS LEAVED GOLDENROD	1.0
CREeping RED FESCUE	24.0
SOFT RUSH	0.5
SENSITIVE FERN	1.0
SWITCH GRASS	8.0
LITTLE BLUESTEM	15.0
GREEN BULLRUSH	1.0
WOOL GRASS	0.5
BLUE VERVAIN	1.0

- THE GENERAL PURPOSE SEED MIX SHALL BE COMPRISED URI #2 OF THE FOLLOWING:

TYPE	% BY WEIGHT
CREeping RED FESCUE	40
IMPROVED PERENNIAL RYE GRASS	20
IMPROVED KENTUCKY BLUEGRASS	30
KENTUCKY BLUEGRASS	10

- EARLY SPRING OR LATE SUMMER SEEDING IS RECOMMENDED. SEEDING SCHEDULE SHOULD CONFORM WITH RHODE ISLAND DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, L.02.03.1 SEEDING DATES. PERMANENT SEEDING SHALL BE DURING THE APRIL 1 TO MAY 31 OR AUGUST 15 TO OCTOBER 15. TEMPORARY SEEDING MAY BE DONE ANYTIME BETWEEN MARCH 15 AND NOVEMBER 15 WITH THE APPROVAL OF THE ENGINEER OF RECORD. FERTILIZE AS REQUIRED BY SOIL TESTING TO COMPLY OR UPGRADE EXISTING CONDITIONS. THE SEED MIX SHALL BE INOCULATED WITHIN 24 HOURS AND BEFORE MIXING AND PLANTING, WITH APPROPRIATE INOCULANTS FOR EACH VARIETY.
- TEMPORARY TREATMENTS SHALL CONSIST OF STRAW OR FIBER MULCH OR PROTECTIVE COVERS SUCH AS A MAT OR FIBER LINING. TEMPORARY STRAW MULCH TO BE TACKED IN PLACE WITH NYLON MESH NETTING. SIDE SLOPES OF BASINS SHALL BE TREATED WITH NORTH AMERICAN GREEN EROSION CONTROL BLANKETS SUCH AS SIS0 OR APPROVED EQUAL. THEY SHALL BE INCORPORATED INTO THE WORK AS WARRANTED OR AS ORDERED BY THE ENGINEER. STRAW APPLICATIONS SHALL BE IN THE AMOUNT OF 2 TONS/ACRE.
- ALL SILT FENCE OR TEMPORARY PROTECTION SHALL REMAIN IN PLACE UNTIL AN ACCEPTABLE STAND OF GRASS OR APPROVED GROUND COVER IS ESTABLISHED.
- ALL FILL SHALL BE THOROUGHLY COMPACTED UPON PLACEMENT IN STRICT CONFORMANCE WITH RHODE ISLAND DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION PART 200.
- STOCKPILES OF TOPSOIL SHALL NOT BE LOCATED NEAR WATERWAYS. THEY SHALL HAVE SIDE SLOPES NO GREATER THAN 2:1 AND SHALL BE TEMPORARILY SEEDED AND/OR STABILIZED.
- ALL AREAS PROPOSED TO BE VEGETATED THAT ARE DISTURBED BY CONSTRUCTION SHALL BE STABILIZED WITH PERMANENT SEEDING IMMEDIATELY FOLLOWING FINISH GRADING. PERMANENTLY SEEDED AREAS SHALL BE PROTECTED DURING ESTABLISHMENT WITH MULCH. ALL SEEDED AREAS SHALL BE CHECKED REGULARLY TO SEE THAT A GOOD STANDARD IS MAINTAINED. WELL ESTABLISHED VEGETATION SHALL BE MAINTAINED. BARE OR ERODED AREAS SHALL BE IMMEDIATELY REPAIRED AND RESEEDED BY THE CONTRACTOR. ACTIVITIES SHALL BE CONFINED TO WITHIN THE LIMIT OF WORK AS SHOWN ON THE PLANS.
- MAXIMUM PERMANENT GRADED SLOPE WITHIN THE SITE IS TO BE 3:1 UNLESS NOTED OTHERWISE.
- THE CONSTRUCTION SUPERINTENDENT SHALL HAVE OVERALL RESPONSIBILITY FOR PLAN IMPLEMENTATION AND FOR SEEING THAT THE APPROPRIATE WORKERS ARE AWARE OF THE PROVISIONS OF THE PLAN. THE CONTRACTOR MUST REPAIR AND/OR RESEED ANY AREAS THAT DO NOT DEVELOP WITHIN THE PERIOD OF ONE YEAR AND SHALL DO SO AT NO ADDITIONAL EXPENSE TO THE OWNER.
- REFERENCE THE "RHODE ISLAND SOIL EROSION AND SEDIMENTATION CONTROL HANDBOOK" PREPARED BY THE USDA SOIL CONSERVATION SERVICE, REVISED 2014, AS A GUIDE.

MAINTENANCE: SHORT TERM / LONG TERM

- THE STONE STABILIZATION PADS AT THE SITE ENTRANCE SHALL BE MAINTAINED BY THE CONTRACTOR. THE MAINTENANCE SHALL INCLUDE TOP DRESSING WITH ADDITIONAL STONE OR ADDITIONAL LENGTH AS CONDITIONS DEMAND OR AS DIRECTED BY THE ENGINEER. ALL SEDIMENTS SPILLED, DROPPED, WASHED, OR TRACKED ON THE PUBLIC RIGHT OF WAY MUST BE REMOVED IMMEDIATELY BY THE CONTRACTOR.
- ALL SILT FENCE, TEMPORARY TREATMENTS (STRAW, ETC.), AND TEMPORARY PROTECTION SHALL BE MAINTAINED BY THE CONTRACTOR THROUGHOUT CONSTRUCTION. SILT FENCE SHALL BE INSPECTED BY THE CONTRACTOR WITHIN 24 HOURS AFTER EACH STORM EVENT OR EVERY 7 DAYS, WHICHEVER COMES FIRST, FOR UNDERMINING AND DETERIORATION. A STORM EVENT SHALL BE DEFINED AS 0.25 INCHES OF RAIN WITHIN A 24-HOUR PERIOD. THE SILT FENCE SHALL BE REPAIRED OR REPLACED AS WARRANTED. THE CONTRACTOR SHALL CLEAN THE ACCUMULATED SEDIMENT IF HALF OF THE ORIGINAL HEIGHT OF THE SILT FENCE BECOMES FILLED IN WITH SEDIMENT. THE SILT FENCE SHALL REMAIN IN PLACE UNTIL AN ACCEPTABLE STAND OF GRASS OR APPROVED GROUND COVER IS ESTABLISHED. FOLLOWING CONFIRMATION FROM THE OWNER AND OR THE PROJECT ENGINEER THAT AN ACCEPTABLE STAND OF GRASS OR APPROVED GROUND COVER HAS BEEN ESTABLISHED THE SILT FENCE SHALL BE REMOVED.
- THE CONTRACTOR SHALL MAINTAIN ALL TOPSOIL STOCKPILES AND SEDIMENT BARRIERS THROUGHOUT CONSTRUCTION. EXTREME CARE SHALL BE TAKEN TO ENSURE THAT SEDIMENTS DO NOT SPILL OVER THE SEDIMENT BARRIER. SILT FENCE SHALL BE STAKED AROUND THE STOCKPILES.
- ALL DISTURBED SLOPES EITHER NEWLY CREATED OR CURRENTLY EXPOSED SHALL BE SEEDED, PROTECTED, AND MAINTAINED BY THE CONTRACTOR FOLLOWING FINAL GRADING AND CONSTRUCTION. THE CONTRACTOR SHALL CHECK ALL SEEDED AREAS REGULARLY TO SEE THAT A GOOD STAND OF VEGETATION IS MAINTAINED. THE CONTRACTOR MUST REPAIR OR RESEED ANY AREAS THAT DO NOT DEVELOP WITHIN THE PERIOD OF ONE YEAR AND SHALL DO SO AT NO ADDITIONAL EXPENSE TO THE OWNER.
- THE CONTRACTOR IS RESPONSIBLE FOR MAINTENANCE AND INSPECTION OF THE DRAINAGE BMPs DURING AND UP TO A YEAR AFTER COMPLETION OF CONSTRUCTION AND ACCEPTANCE BY THE OWNER. THE OWNER IS RESPONSIBLE FOR INSPECTIONS AND MAINTENANCE THEREAFTER. THE DRAINAGE BMPs SHALL BE INSPECTED/MAINTAINED AS DETAILED BELOW.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSPECTION, MAINTENANCE AND REPAIR TO ALL DRAINAGE STRUCTURES AND RELATED APPURTENANCES ON SITE DURING CONSTRUCTION AND IMMEDIATELY FOLLOWING CONSTRUCTION FOR A MAXIMUM OF ONE YEAR, OR UNTIL ACCEPTANCE BY THE ENGINEER AND THE OWNER. THE OWNER IS RESPONSIBLE FOR INSPECTIONS AND MAINTENANCE THEREAFTER.
- A LEGALLY BINDING AND ENFORCEABLE MAINTENANCE AGREEMENT SHALL BE EXECUTED BETWEEN THE OWNER AND THE RESPONSIBLE AUTHORITY TO ENSURE THE FOLLOWING MAINTENANCE SCHEDULES ARE FOLLOWED.
- DURING THE FIRST SIX (6) MONTHS OF OPERATIONS, INSPECTIONS SHALL BE ACCOMPLISHED IN EACH DRAINAGE BMP AFTER EVERY RAINFALL EVENT, TO CHECK FOR CLOGGING OR, CONVERSELY, TOO RAPID A STORMWATER RELEASE. FOLLOWING THE SIX (6) MONTHS, INSPECTIONS SHALL BE CONDUCTED, AT A MINIMUM, ANNUALLY.
- IF STANDING WATER IS OBSERVED WITHIN THE DRAINAGE BMPs FOR MORE THAN THREE (3) DAYS AFTER A RAINFALL, THEN FAILURE OF THE SYSTEM MAY HAVE OCCURRED AND SHALL BE ADDRESSED THROUGH REPAIR OR REPLACEMENT.
- THE CONSTRUCTION SUPERINTENDENT SHALL HAVE OVERALL RESPONSIBILITY FOR THE MAINTENANCE PROGRAM DURING THE CONSTRUCTION PHASE AND FOR A PERIOD OF ONE YEAR AFTER CONSTRUCTION. THE SUPERINTENDENT SHALL SEE THAT THE APPROPRIATE WORKERS ARE AWARE OF THE PROVISIONS OF THE PLAN.
- AFTER ACCEPTANCE OF THE SITE BY THE OWNER, THE OWNER SHALL HAVE OVERALL RESPONSIBILITY FOR IMPLEMENTING THE MAINTENANCE PROGRAM FOR THE STORMWATER MANAGEMENT PLAN.
- THE RESPONSIBLE PARTY FOR THE STORMWATER MANAGEMENT PROGRAM IS THE OWNER OF THE SITE. THE FUNDING FOR THE STORMWATER MANAGEMENT PROGRAM IS BY THE OWNER. IF THE PROPERTY IS SOLD, THE RESPONSIBILITY OF THE STORMWATER MANAGEMENT PROGRAM WILL BE TRANSFERRED TO THE NEW OWNER.

THE FOLLOWING MAINTENANCE PROCEDURES MUST BE FOLLOWED FOR THE RAIN GARDEN:

- RAIN GARDENS SHALL BE INSPECTED FOLLOWING AT LEAST THE FIRST TWO PRECIPITATION EVENTS OF AT LEAST 1.0 INCH TO ENSURE THAT THE SYSTEM IS FUNCTIONING PROPERLY. THEREAFTER, THE RAIN GARDEN SHALL BE MONITORED AND MAINTAINED TO ASSURE PROPER FUNCTIONING, PLANT GROWTH, AND SURVIVAL. PLANTS SHALL BE REPLACED ON AS-NEEDED BASIS DURING THE GROWING SEASON.
- SILT/SEDIMENT SHALL BE REMOVED FROM THE RAIN GARDEN WHEN THE ACCUMULATION EXCEEDS ONE INCH, OR WHEN WATER POUNDS ON THE SURFACE OF THE RAIN GARDEN FOR MORE THAN 48 HOURS. THE TOP FEW INCHES OF MATERIAL SHALL BE REMOVED AND SHALL BE REPLACED WITH FRESH SOIL MIXTURE AND MULCH.
- PRUNING OR REPLACEMENT OF WOODY VEGETATION SHALL OCCUR WHEN DEAD OR DYING VEGETATION IS OBSERVED.
- SOIL EROSION GULLIES SHALL BE REPAIRED WHEN THEY OCCUR.
- FERTILIZER OR PESTICIDES SHALL NOT BE APPLIED TO PLANTS WITHIN RAIN GARDENS.
- PERENNIAL PLANTS AND GROUND COVERS SHALL BE REPLACED AS NECESSARY TO MAINTAIN AN ADEQUATE VEGETATED GROUND COVER. ANNUAL PLANTS MAY ALSO BE USED TO MAINTAIN GROUND COVER.

SEQUENCE OF CONSTRUCTION OF CONSTRUCTION AND STAGING OF LAND DISTURBING ACTIVITIES


- CONTRACTOR IS RESPONSIBLE FOR SOIL EROSION AND SEDIMENT CONTROL (SE & SC) ON SITE. SEQUENCE OF CONSTRUCTION PROVIDED MAY BE MODIFIED AS FIELD CONDITIONS WARRANT WITH PRIOR APPROVAL FROM OWNER OR THEIR REPRESENTATIVE.
- CONSTRUCTION TO BEGIN IN THE SPRING 2023 OR UPON RECEIPT OF ALL NECESSARY APPROVALS.
- SURVEY AND STAKE THE DRAINAGE BMPs (RAIN GARDEN), DRAIN LINES, AND LIMIT OF SEDIMENTATION BARRIERS/LIMIT OF DISTURBANCE.
- PLACE SEDIMENTATION BARRIERS (SILT FENCE OR APPROVED EQUAL) AS SHOWN ON THE PLANS AND STAKED OUT IN THE FIELD. IN NO CASE IS THE LIMIT OF WORK TO EXTEND BEYOND THE SEDIMENTATION BARRIERS. PLACE BARRIERS AROUND VEGETATED SWALE. NO CONSTRUCTION TRAFFIC IS PERMITTED IN THESE AREAS.
- INSTALL TEMPORARY SEDIMENTATION CONTROL MEASURES AND DEVICES AS WARRANTED. ALL TEMPORARY CONTROL DEVICES SHALL BE INSTALLED PER THE RHODE ISLAND SOIL EROSION AND SEDIMENTATION CONTROL HANDBOOK.
- BEGIN DEMOLITION AND CLEARING AND GRUBBING IN AREA OF THE BUILDING, DRAINAGE BMPs, AND OTHER AREAS AS INDICATED ON THE PLANS. TOPSOIL IS TO BE STRIPPED AND STOCKPILED IN APPROVED LOCATIONS. TOPSOIL STOCKPILES ARE TO BE PROTECTED BY A ROW OF SEDIMENTATION BARRIERS AND COVERED OR TEMPORARILY SEEDED.
- BEGIN CONSTRUCTION OF THE BUILDING FOUNDATION AND STRUCTURE.
- BEGIN CONSTRUCTION OF DRAINAGE BMPs.
- ONCE THE SITE IS STABILIZED THE DRAINAGE BMPs AND DRAINAGE NETWORK MAY BE BROUGHT ONLINE WITH THE APPROVAL OF THE DESIGN ENGINEER.
- REMOVE ALL TEMPORARY SOIL EROSION AND SEDIMENTATION CONTROL MEASURES FOLLOWING VEGETATIVE ESTABLISHMENT OF ALL DISTURBED AREAS.

STRUCTURAL MEASURES

- RUNOFF WATER QUALITY IS IMPROVED UTILIZING A RAIN GARDEN. CONSTRUCTION OF THE BMPs SHALL BE SUPERVISED BY THE PROJECT ENGINEER.
- A STONE STABILIZATION PAD IS LOCATED AT THE SITE ENTRANCE TO REDUCE THE TRACKING OR FLOWING OF SEDIMENT ONTO THE PUBLIC RIGHT OF WAY.
- SILT FENCE SHALL BE INSTALLED DOWNSTREAM OUTSIDE THE LIMITS OF ANY PROPOSED CONSTRUCTION AS SHOWN ON THE SITE PLANS AND PRIOR TO THE COMMENCEMENT OF THE PROPOSED ALTERATION.
- IF NECESSARY TEMPORARY BERMS AND / OR SWALES SHALL BE USED DURING CONSTRUCTION TO DIRECT SURFACE TO TEMPORARY SEDIMENTATION TRAPS TO CAPTURE AND TREAT THE MAXIMUM AMOUNT OF STORMWATER.
- THE RAIN GARDEN AREAS ARE NOT TO BE USED AS SEDIMENTATION TRAPS DURING CONSTRUCTION AND SHALL BE PROTECTED FROM CONSTRUCTION ACTIVITIES (I.E. HEAVY MACHINERY) TO PREVENT COMPACTION. THE CONTRACTOR SHALL CONSTRUCT ANY SEDIMENTATION TRAPS WHICH ARE REQUIRED TO MEET ALL GUIDELINES IN THE RHODE ISLAND SOIL EROSION SEDIMENT CONTROL HANDBOOK.
- THE CONSTRUCTION SUPERINTENDENT SHALL HAVE THE OVERALL RESPONSIBILITY FOR STRUCTURAL MEASURE IMPLEMENTATION AND FOR SEEING THAT THE APPROPRIATE WORKERS ARE AWARE OF THE PROVISIONS OF THE PLAN.
- REFERENCE THE "RHODE ISLAND SOIL EROSION AND SEDIMENT CONTROL HANDBOOK" PREPARED BY THE USDA SOIL CONSERVATION SERVICE, REVISED 2014, AS A GUIDE.
- INSTALL ROOF LEADERS TO DIRECT STORMWATER TOWARDS THE RAIN GARDEN.

NON-STRUCTURAL MEASURES

- CONSTRUCTION TRAFFIC SHALL BE LIMITED TO THE ACCESS ROAD, UTILITY EASEMENTS AND AREAS TO BE GRADED.
- TOPSOIL SHALL BE STRIPPED FROM AREAS TO BE GRADED AND STOCKPILED FOR LATER USE. STOCKPILE LOCATION SHALL BE SUBJECT TO APPROVAL BY THE PROJECT ENGINEER. A SEDIMENT BARRIER SHALL SURROUND ALL TOPSOIL STOCKPILES.
- ALL TYPES OF WASTE GENERATED AT THE SITE SHALL BE DISPOSED OF IN A MANNER CONSISTENT WITH STATE LAW AND TOWN REGULATIONS. CONSTRUCTION DEBRIS SHALL BE DISPOSED OF DAILY TO AVOID EXPOSURE TO PRECIPITATION.
- THE CONSTRUCTION SUPERINTENDENT SHALL HAVE OVERALL RESPONSIBILITY FOR PLAN IMPLEMENTATION OF NON-STRUCTURAL MEASURES AND FOR SEEING THAT THE APPROPRIATE WORKERS ARE AWARE OF THE PROVISIONS OF THE PLAN.
- REFERENCE THE "RHODE ISLAND SOIL EROSION AND SEDIMENT CONTROL HANDBOOK" PREPARED BY THE USDA SOIL CONSERVATION SERVICE, REVISED 2014, AS A GUIDE.

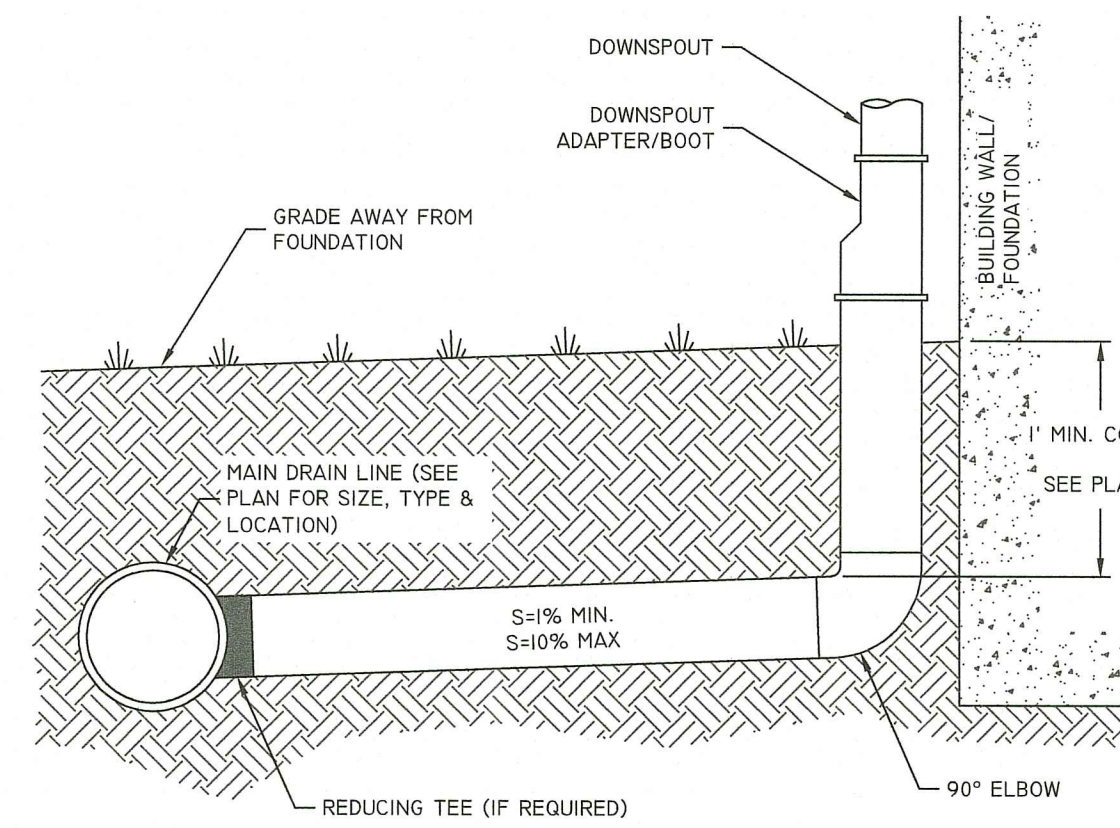

DOWNSPOUT CONNECTION DETAIL
NOT TO SCALE

DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF WATER RESOURCES
OWTS & FRESHWATER WETLANDS
JOINT PERMIT APPROVAL

OWTS# 2216-0913 DW# 22-0505

APPROVED: *[Signature]* DATE: 2/21/23

No Changes Allowed Without RIDEM Approval
Approval Plans/Permit Must Be kept at Construction Site

SIZING NOTE:
1. RAIN GARDENS SIZED USING TABLE 8 OF THE STATE OF RHODE ISLAND STORMWATER MANAGEMENT GUIDANCE FOR INDIVIDUAL SINGLE-FAMILY RESIDENTIAL LOT DEVELOPMENT

SIZING DATA
SOIL CONDITIONS: SANDY
RAIN GARDEN DEPTH: 8 INCHES

RAIN GARDEN SIZING CALCULATION (RAIN GARDEN A):
TOTAL IMPERVIOUS AREA = 2,576 SF (ROOF)


RAIN GARDEN SIZING RATIO =
$$\frac{160 \text{ SF}}{1,000 \text{ SF}} = \frac{X \text{ SF}}{2,576 \text{ SF}} = 412.2 \text{ SF RAIN GARDEN REQUIRED}$$

RAIN GARDEN AREA PROVIDED = 420 SF

RAIN GARDEN SIZING CALCULATION (RAIN GARDEN B):
TOTAL IMPERVIOUS AREA = 5,143.13 SF (DRIVEWAY)

RAIN GARDEN SIZING RATIO =
$$\frac{160 \text{ SF}}{1,000 \text{ SF}} = \frac{X \text{ SF}}{5,143.13 \text{ SF}} = 822.9 \text{ SF RAIN GARDEN REQUIRED}$$


RAIN GARDEN AREA PROVIDED = 825 SF

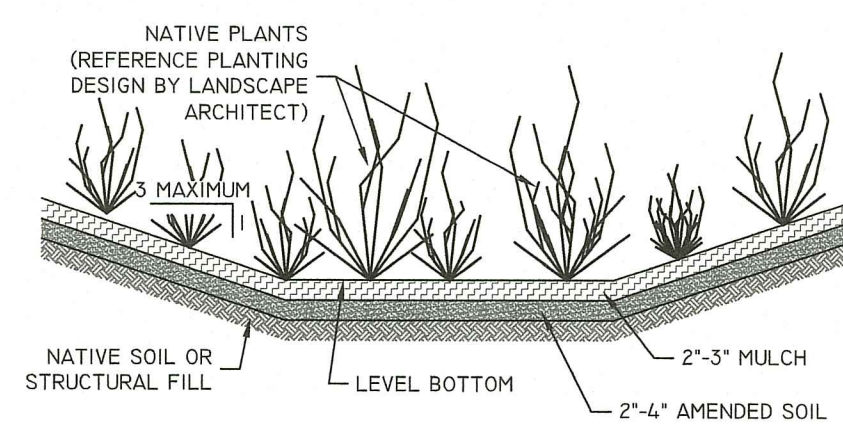


RAIN GARDEN CROSS SECTION
NOT TO SCALE

NOTES:


- SHALL BE IN ACCORDANCE WITH SECTION 206 OF THE R.I. STANDARD SPECIFICATIONS.
- 2"x2"x4'-6" (MAXIMUM) OAK POSTS FOR SILT FENCE SHALL BE LOCATED 8'-0" (MAXIMUM) O.C. IN WETLAND AREAS AND 4'-0" (MAXIMUM) O.C. IN WETLAND RAVINE. GULLY OR DROWN-OFF AREAS AS SHOWN ON PLANS.
- 1"x1"x4'-6" (MINIMUM) POSTS PERMITTED FOR PRE-FABRICATED SILT FENCE.
- SILT FENCE SHALL BE INSTALLED BEFORE ANY GRUBBING OR EARTH EXCAVATION TAKES PLACE.

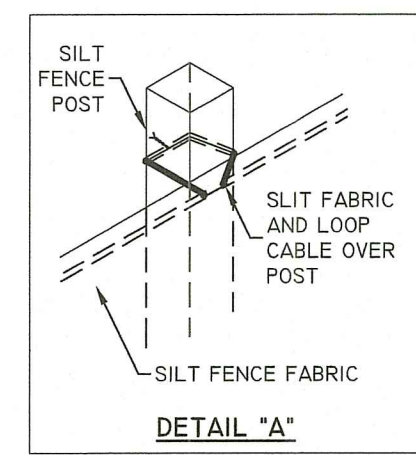

SILT FENCE DETAIL
NOT TO SCALE

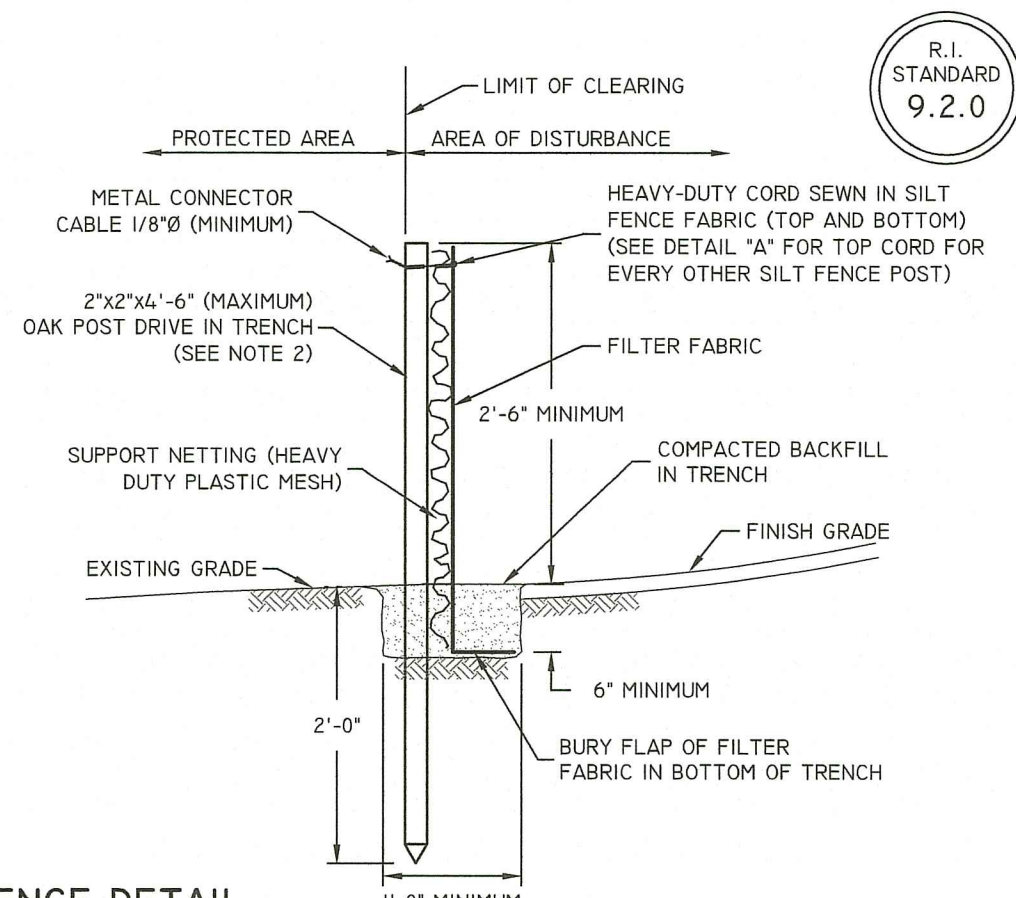


SILT FENCE DETAIL
NOT TO SCALE

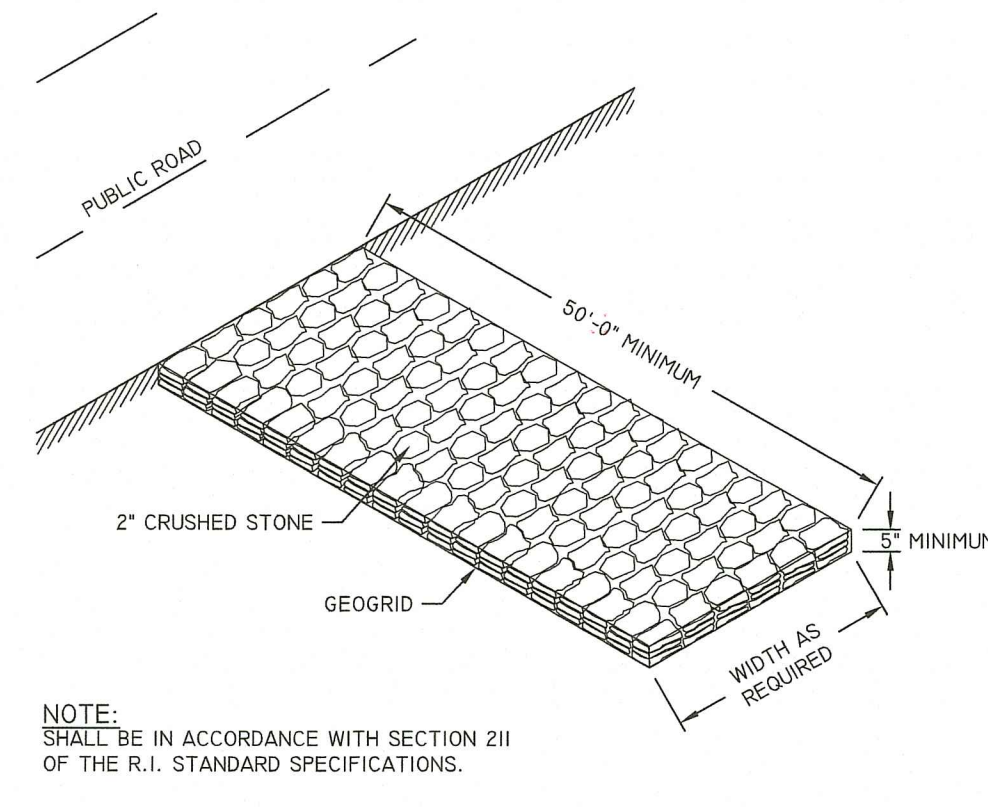

CONSTRUCTION ACCESS
NOT TO SCALE

NOTE:
THIS PAVEMENT SECTION DETAIL REFLECTS ASSUMED MINIMUM REQUIREMENTS WITHOUT GEOTECHNICAL EVALUATION.

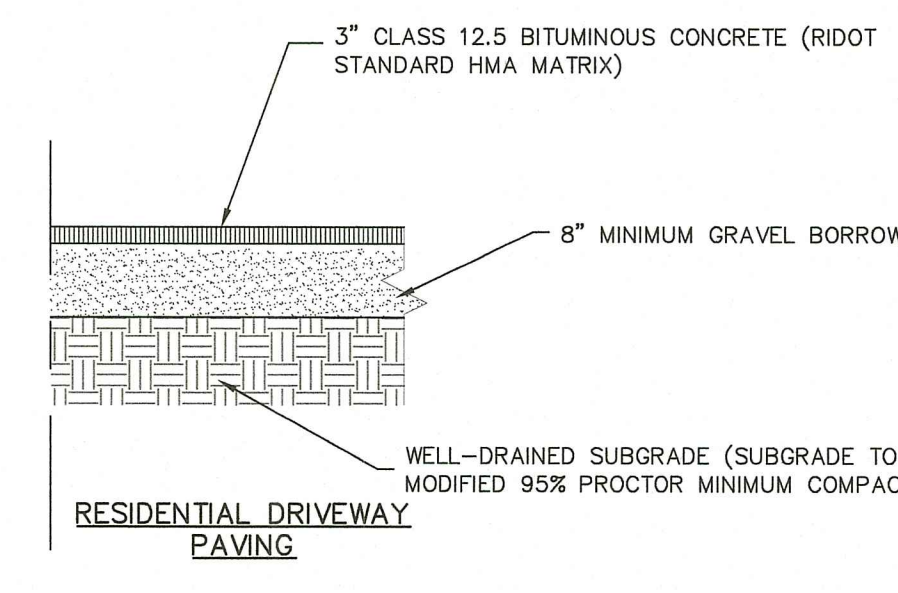

Typical Residential Driveway Section
NOT TO SCALE

DiPrete Engineering
Two Stafford Court Cranston, RI 02920
tel: 401-949-1600 fax: 401-949-6666 www.diprete-eng.com

Boston • Providence • Newport

JASON P. CLOUGH
No. *[Signature]*
REGISTERED PROFESSIONAL ENGINEER CIVIL

NO.	DATE	DESCRIPTION	BY:
1	2-15-2023	PROJECT COMMENTS - 2	S.R.
2	2-17-2023	PROJECT SUBMISSION	S.R.
3	2-21-2023	PROJECT SUBMISSION	S.R.

DESIGN BY: J.P.C.
DRAWN BY: S.R.

DETAIL SHEET
64 RESERVOIR AVENUE
ASSESSOR'S PLAT 43 LOT 675
JOHNSTON, RHODE ISLAND

PREPARED FOR:
HARTFORD SOLAR REALTY, LLC
56 PINE STREET 3RD FLOOR, PROVIDENCE, RHODE ISLAND

DE JOB NO: 2505-004. COPYRIGHT 2023 BY DIPRETE ENGINEERING ASSOCIATES, INC.